

# PURA



ISO 11607.2 VALIDATABLE  
ROTARY MEDICAL SEALER  
SPACE SAVING AND ERGONOMIC DESIGN  
OPERATED BY TOUCH SCREEN

THE PERFECT CHOICE FOR HOSPITALS WHO PRIORITIZE BOTH FUNCTION AND AESTHETICS.



SLEEK AND STYLISH DESIGN TO ALLOW YOU TO PACK MEDICAL DEVICES WITH CONFIDENCE, SPEED AND EASINESS.

WIDE TOUCHSCREEN, 10MT/MIN SPEED AND PRE-SETTING OF THE SEALING PARAMETERS FOR THE MOST USED MATERIALS FOR STERILE REPROCESSING (BOP, TYVEK, ULTRA) MAKE PURA THE BEST CHOICE IN TERMS OF VERSATILITY AND COST EFFICIENCY.

WHETHER YOU'RE IN A LABORATORY OR A CSSD PURA ADDS A TOUCH OF ITALIAN ELEGANCE TO YOUR SEALING PROCESS.

COMPLIANT TO WORLD HEALTH ORGANISATION GUIDELINE REQUIREMENTS AND WORLD FEDERATION FOR HOSPITAL STERILISATION SCIENCES (WFHSS) NEW GUIDELINE

VALIDATABLE SEALING PROCESS ACCORDING TO EN ISO 11607-2 AND INTERNATIONAL GUIDANCE ISO/TS 16775.

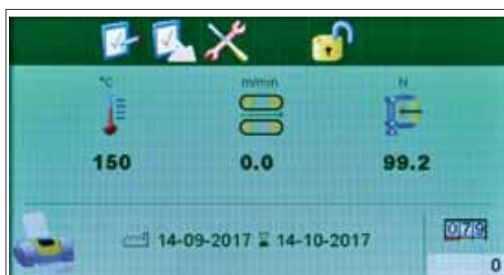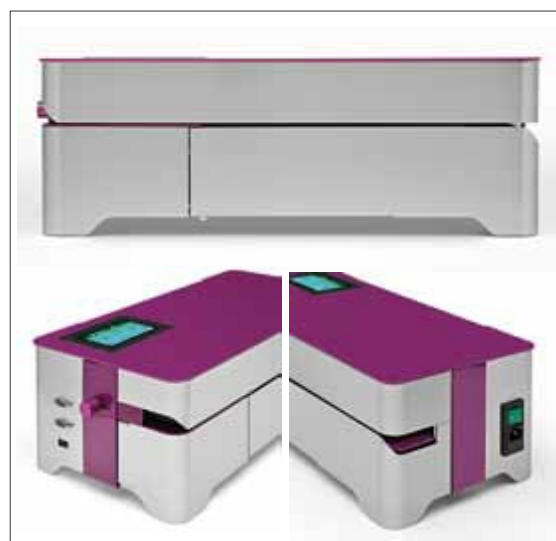

## BENEFITH AND ADVANTAGES

- STAINLESS STEEL HOUSING
- 4,3 INCH TOUCH SCREEN DISPLAY (OPERABLE WITH GLOVES)
- CUSTOMIZED SEAL: CHOOSE BETWEEN FLAT SEAL, SUITABLE ESPECIALLY FOR TYVEK® POUCHES AND MULTILINE SEAL, SUITABLE FOR LAMINATE AND PAPER POUCHES
- DISPLAY INDIVIDUALLY ADJUSTABLE
- FREELY PROGRAMMABLE PACKAGING LISTS
- FOR ALL PACKAGING MATERIAL IN ACCORDANCE WITH EN 868-5 (INCL. UNCOATED TYVEK MATERIAL AND NONWOVEN PP, E. G. STERICLIN'S WHITE LINE MATERIAL)
- FRONT DOOR FOR PRINT CARTRIDGE REPLACEMENT
- CONNECTION WITH PRINTER, SCANNER, MATRIX READER, ETC.
- SPACE SAVING AND ERGONOMIC DESIGN
- UTMOST SAFETY
- SUSTAINABLE BECAUSE DESIGNED AND MANUFACTURED TO ENABLE PROCESS OPTIMIZATION FULLY RESPECTING ENERGY SAVING EFFICIENCIES.

**PRODUCT DESIGN AND ENGINEERING  
DEVELOPED WITH SCIENTIFIC SUPPORT  
OF POLITECNICO DI MILANO,  
DESIGN DEPARTMENT.**

## ISO 11607,2 VALIDATABLE MEDICAL ROTARY SEALER SPACE SAVING, OPERATED BY TOUCH SCREEN

### GENERAL FEATURES

ANODIZED ALUMINIUM AND AISI 304 STAINLESS STEEL  
BUILT-IN ADJUSTABLE GUIDE  
ADJUSTABLE FREE EDGE

### SEALING

CUSTOMIZED KIND OF SEALING: FLAT OR MULTILINE  
SEALING WIDTH 15 MM  
SEAL DISTANCE FROM THE EDGE MM 0-35

### PACKAGING

POUCHES/REELS EN 868-5, TYVEK® POUCHES/REELS, PAPER POUCHES EN 868-4, GUSSETED POUCHES/REELS, PP POUCHES, LAMINATED AL POUCHES, ULTRA® POUCHES/REELS

### ISO 11607-2

SEALING VALIDATION THROUGH AUTOMATIC CRITICAL SEALING PARAMETERS CONTROL  
TEMPERATURE, FORCE AND SPEED CONTROL  
SEALING PARAMETERS VISUALIZATION AND RECORDING  
OVERHEATING TEMPERATURE PROBE  
SEALER FUNCTIONING DIAGNOSTIC AND CHECK  
ALARM/STOP TEMPERATURE TOLERANCE +/- 5 °C (DIN 58953-7)  
FORCE/SPEED/TIME ALARM AND STOP

### CERTIFICATIONS/SAFETY

UNI EN ISO 11607-2  
UNI EN 868-5  
EN ISO TS 16775  
DIN 58953-7  
DIRECTIVES 2006/42/EC-2014/30/EU-2014/35/EU  
UNI/TR 11408:2011  
MANUFACTURED IN A UNI EN ISO 9001:2015 QUALITY SYSTEM CERTIFIED COMPANY

### EXTERNAL PERIPHERIES

LABELS PRINTER / BARCODE SCANNER  
TRACEABILITY AND SOFTWARE  
TRACEABILITY THROUGH USB PEN DRIVE  
SECURSCAN DATA UPLOAD SOFTWARE

### PARAMETERS

SEALING SPEED 10 MT/MIN  
MAX SEALING TEMPERATURE 200°C  
REFERENCE SEALING FORCE 100 N  
TEMPERATURE TOLERANCE ± 1%  
FORCE RANGE 80-120 N

### CALIBRATION

HEATING AUTOCALIBRATION FUNCTION  
AUTOTUNING FUNCTION  
AUTOMATIC SELF CHECK OF THERMOCOUPLE BATTERY AND REMOTE SERVER CONDITION AT START-UP  
TEMPERATURE / FORCE / SPEED CALIBRATION

### INTERFACES

TOUCH SCREEN WITH 4,3" COLORS DISPLAY  
PC CONNECTION  
REMOTE CONTROL VIA ETHERNET  
LABELS PRINTER  
BARCODE SCANNER  
RS 232 PORT/USB PORT

### DATABASE

TEXTS SAVING  
POUCH / SEALER ID SAVING  
OPERATORS / EXPIRY DATE / BATCH CODE SAVING  
PRESETTABLE PROGRAMS

### FUNCTIONS

MICROPROCESSOR / MULTILANGUAGE MENU  
STARTING / PRINTING PHOTOCCELL  
SPEED AND TEMPERATURE SETTING  
OPERATORS / BATCHES / CATALOGUES / EXPIRY DATES SETTING  
STAND BY / ENERGY SAVING  
ON BOARD BATTERY  
SETTINGS / MAINTENANCE PASSWORD  
ABSOLUTE / SETTABLE / MAINTENANCE COUNTER  
CLOCK AND CALENDAR FUNCTION / BEEPER ON/OFF  
PROGRAMMED MAINTENANCE

### BUILT-IN PRINTER FUNCTIONS

1 PRINT LINE  
ON/OFF PRINT, EN / CE SYMBOLS  
AUTOMATIC PRINT ADJUSTMENT TO POUCH WIDTH / PRINT POSITION ADJ  
STANDARD OR 180° ROTATION PRINT IMAGE  
SETTABLE PRINTING FORMATS, CHARACTER DIMENSIONS, SEQUENCE  
PRODUCTION AND EXPIRY DATE  
BATCH AND OPERATOR ALPHANUMERIC CODE  
CATALOGUE STRINGS  
POUCH PROGRESSIVE NUMBER, POUCH AND SEALER ID  
SEALING SPEED / TEMPERATURE / FORCE; SEALING REPORT PRINT

### LABELS PRINTER FUNCTIONS

ON/OFF PRINT, CE SYMBOLS  
BARCODE  
LABEL DIMENSIONS SETTING AND SETTABLE PRINTING SEQUENCE  
PRODUCTION AND EXPIRY DATE; BATCH AND OPERATOR ALPHANUMERIC CODE  
CATALOGUE STRINGS  
POUCH PROGRESSIVE NUMBER, POUCH AND SEALER ID  
SEALING SPEED / TEMPERATURE / FORCE  
SEALING REPORT PRINT  
STANDARD OR 180° ROTATION PRINT IMAGE  
MULTI LABELS PRINT

### POWER SUPPLY

POWER SUPPLY 100; 110/115; 230/240 VAC SINGLE PHASE  
FREQUENCY 50/60 Hz; MULTI-FREQUENCY;  
AVERAGE POWER CONSUMPTION 150 W\*

### ACCESSORIES UPON REQUEST

FRONT SUPPORT TRAY; ROLLER SUPPORT TRAY; ROLL HOLDER  
THERMAL TRANSFER LABELS PRINTER; BARCODE SCANNER; ETHERNET MODULE

### SERVICES

SEAL STRENGTH TEST EN 868-5  
TEMPERATURE / FORCE / SPEED CALIBRATION  
MAINTENANCE

### DIMENSIONS AND WEIGHT

DIMENSIONS MM 553x264x192 / WEIGHT Kg 18